

NAVIN ROPE SLINGS


ni manufactures *steel wire rope slings* as per **IS 2762: 2009** up to 52 mm diameter, whether hand or mechanically spliced termination using a aluminum alloy ferrule. We use wire rope of 1770 Grade (or as per customers demand) confirming to **IS 2266: 2002**.

Navin Rope Slings is used in various types of lifting, excavation, and loading/ unloading of materials. It can also be used in factories or industries where hoist cranes and heavy duty lifting machines work.

In general, wire rope slings are made up of 6 x 19 or 6 x 37 classification of wire rope.

P.S. – Rotation Resistant wire rope should **not** be used for wire rope slings.

Various forms of Slings:

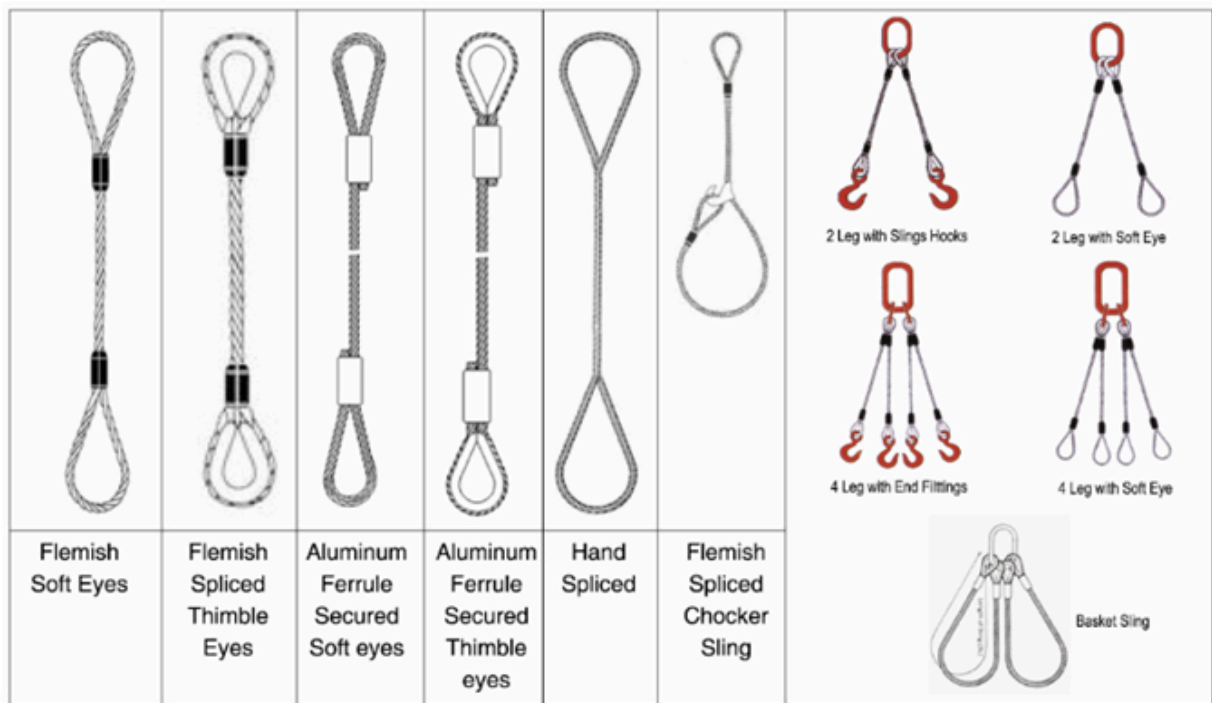

**(FOR ANY FURTHER ASSISTANCE CALL 011-23232005 OR
EMAIL US AT info@navinrope.com)**